




Code:	COLD UNITS	Model:
173701010	PREMIER F 70 GN 2/1 SINGLE DOOR FREEZER CABINET	PREMIER F 70



#### MAIN FEATURES

- \* GN 2/1 size refrigerator with single door
- \* 304 quality stainless steel
- \* Operating temperature -25/-5 °C
- \* Clean free condenser
- \* Maximum internal capacity, minimum temperature increase during defrost
- \* Most efficient air distribution inside with a special designed air channel
- \* The inner liners and inner lower base which are moulded comply with the highest hygiene standards with rounded corners and made of stainless steel
- \* Monoblock design
- \* Automatic fan cutout switch and internal led light
- \* Wide magnetic removable gasket with triple insulation area provides an effective seal which reduces heat lost
- \* 40-42 kg/m3 density environment friendly HFC-Free Polyurethane insulation for low energy consumption (78 mm)
- \* Protecting Class (IP2X)
- \* Ventilated cooling design
- \* Reversible door allows the appliances to be adapted to any individual installation site

#### OPTIONS

- \* **Leg Option:** Leg/Castor
- \* **Shelf Option:** Nylon/Stainless
- \* **Plug Option:** UK/EU
- \* **Door Option:** Left Hinged / Right Hinged

#### ACCESSORIES

- \* Master Key
- \* Set of Plastic Coated Shelf
- \* Set of Inox Shelf
- \* Set of Stainless Steel Leg
- \* Set of Ø100 Castor


#### STANDARDS

- \* EN 60335-1 European Standard relating to safety of household and similar electrical appliances
- \* EN 60335-2-89 European Standard relating to particular requirements for commercial refrigerating appliances with an incorporated or remote refrigerant unit or compressor
- \* ISO 22041:2019 Refrigerated storage cabinets and counters for professional use Performance and energy consumption





<b>Code:</b>	<b>COLD UNITS</b>	<b>Model:</b>
173701010	PREMIER F 70 GN 2/1 SINGLE DOOR FREEZER CABINET	PREMIER F 70

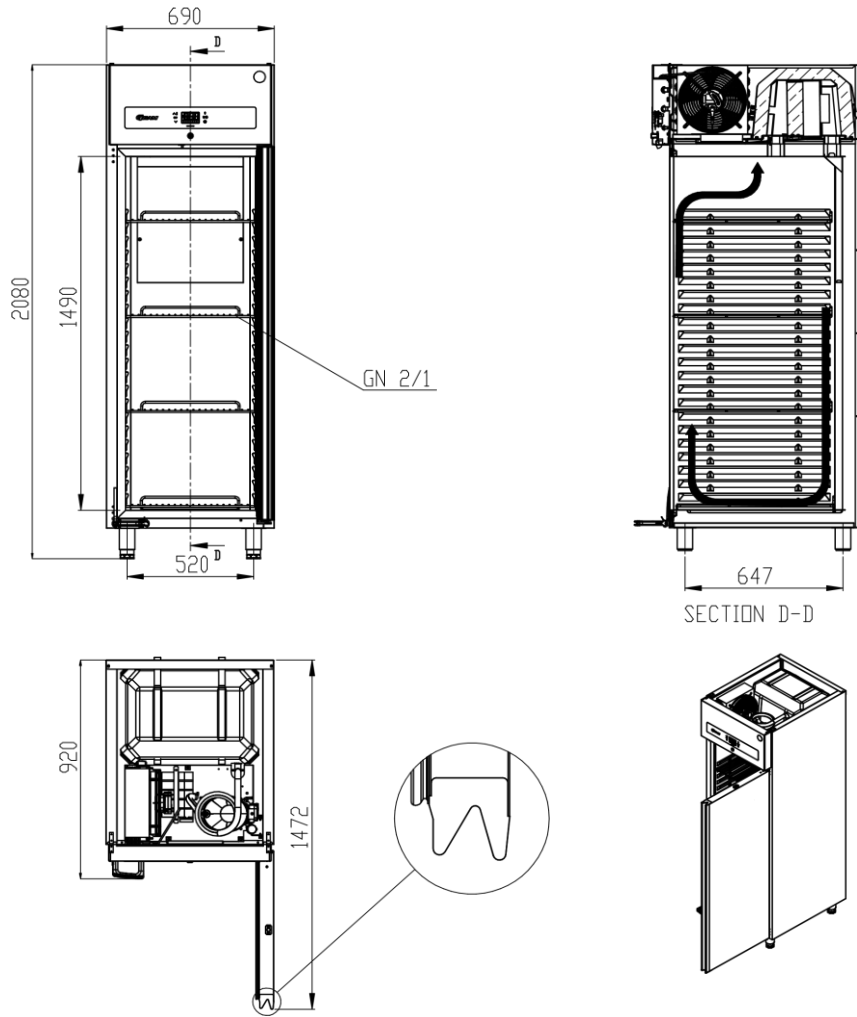

<b>DIMENSIONS (Net)</b>		<b>DIMENSIONS (Shipping)</b>	
* <b>Width (mm):</b>	690	* <b>Width (mm):</b>	750
* <b>Depth (mm):</b>	920	* <b>Depth (mm):</b>	880
* <b>Height (mm):</b>	2080	* <b>Height (mm):</b>	2150
* <b>Weight (kg):</b>	125	* <b>Weight (kg):</b>	135
		* <b>Volume (m³):</b>	1,42

<b>TECHNICAL SPECIFICATIONS</b>			
* <b>Gross Volume:</b>	700 L	* <b>Cooling Temperature:</b>	-25/-5 °C
* <b>Net Volume:</b>	475 L	* <b>Cooling Gas Type:</b>	R290
* <b>Climate Class:</b>	CC5 (+40 °C - %40 Rh)	* <b>Cooling Capacity:</b>	376 W (-30° / +45°)
* <b>Energy Efficiency Class:</b>	C	* <b>Supply Voltage:</b>	230V / NPE 50 Hz
* <b>Energy Efficiency Index:</b>	46,45	* <b>Protection Class:</b>	IP 2X
* <b>Energy Consumption:</b>	4,853 kW/24h	* <b>Cooling System Design:</b>	Ventilated
* <b>Connection Load:</b>	460 W	* <b>Sound Level:</b>	52 dB

