

XF023

Model LINEMICRO™

Project	
Item	
Quantity	
Date	

Convection oven		Electric
4 trays 460x330		Drop down opening
Knob		
Voltage:	220-240V 1~	

Description

Convection oven with analogical control and stainless steel cooking chamber. It allows to set the cooking time and temperature. Ideal for frozen bakery and pastry products for breakfast and fast foods. The AIR.Plus technology guarantees perfect cooking uniformity on all baking trays.



Standard cooking features Manual cooking

• Temperature: 80 °C – 260 °C

Key features

- Cooking chamber in high-resistance AISI 430 steel with rounded edges
- Double glass
- Oven chamber lighting with halogen lamp
- Baking chamber with chrome-plated steel rack rails

Advanced and automatic cooking features Unox Intensive Cooking


• DRY.Plus: rapidly extracts humidity from the cooking chamber





XF023

Views **Connection positions Dimensions and weight**

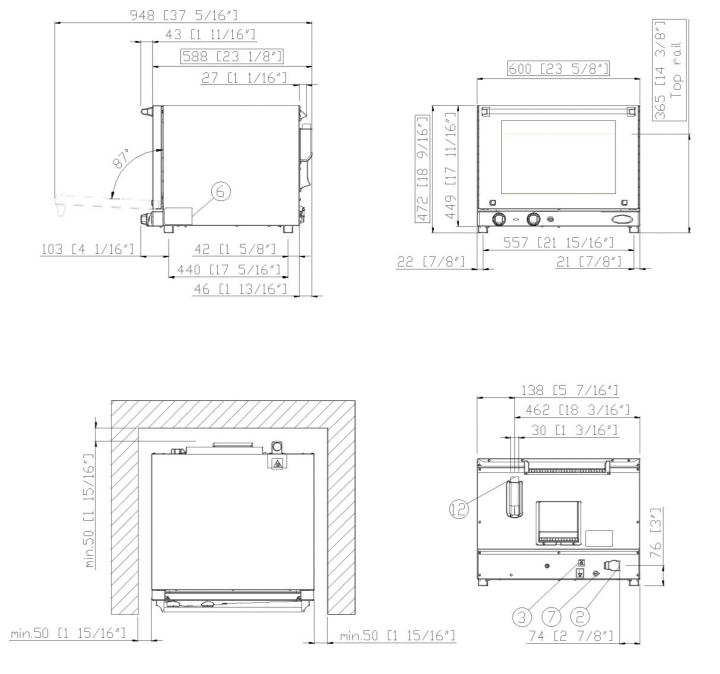

Dimensions and weight

Width	600 mm	
Depth	587 mm	
Height	472 mm	
Net weight	22 kg	
Tray pitch	75 mm	

Connection positions

2	Terminal board power supply	
3	Unipotential terminal	
6	Technical data plate	
7	Safety thermostat	
12	Hot fumes exhaust chimney	



XF023

Electrical power supply

STANDARD

Voltage	220-240 V
Phase	~1PH+PE
Frequency	50 / 60 Hz
Total power	3 kW
Max Amp draw	13 A
Required breaker size	16 A
Power cable requirements*	3G x 1,5 mm^2
Plug	Schuko

*Recommended size - observe local ordinance.

Accessories

- Baking Essentials: special trays
- **SPRAY&Rinse:** Practical spray detergent to manually clean all kinds of oven. It degreases and removes all kind of dirt

Installation requirements

Installations must comply with all local electrical systems, particularly as for minimum wire gauge required for field connection, hydraulic and ventilation supply. Exhaust and fume analysis must be performed in case of gas ovens.

Register to DDC Service to access data and product specifications. www.ddc.unox.com